


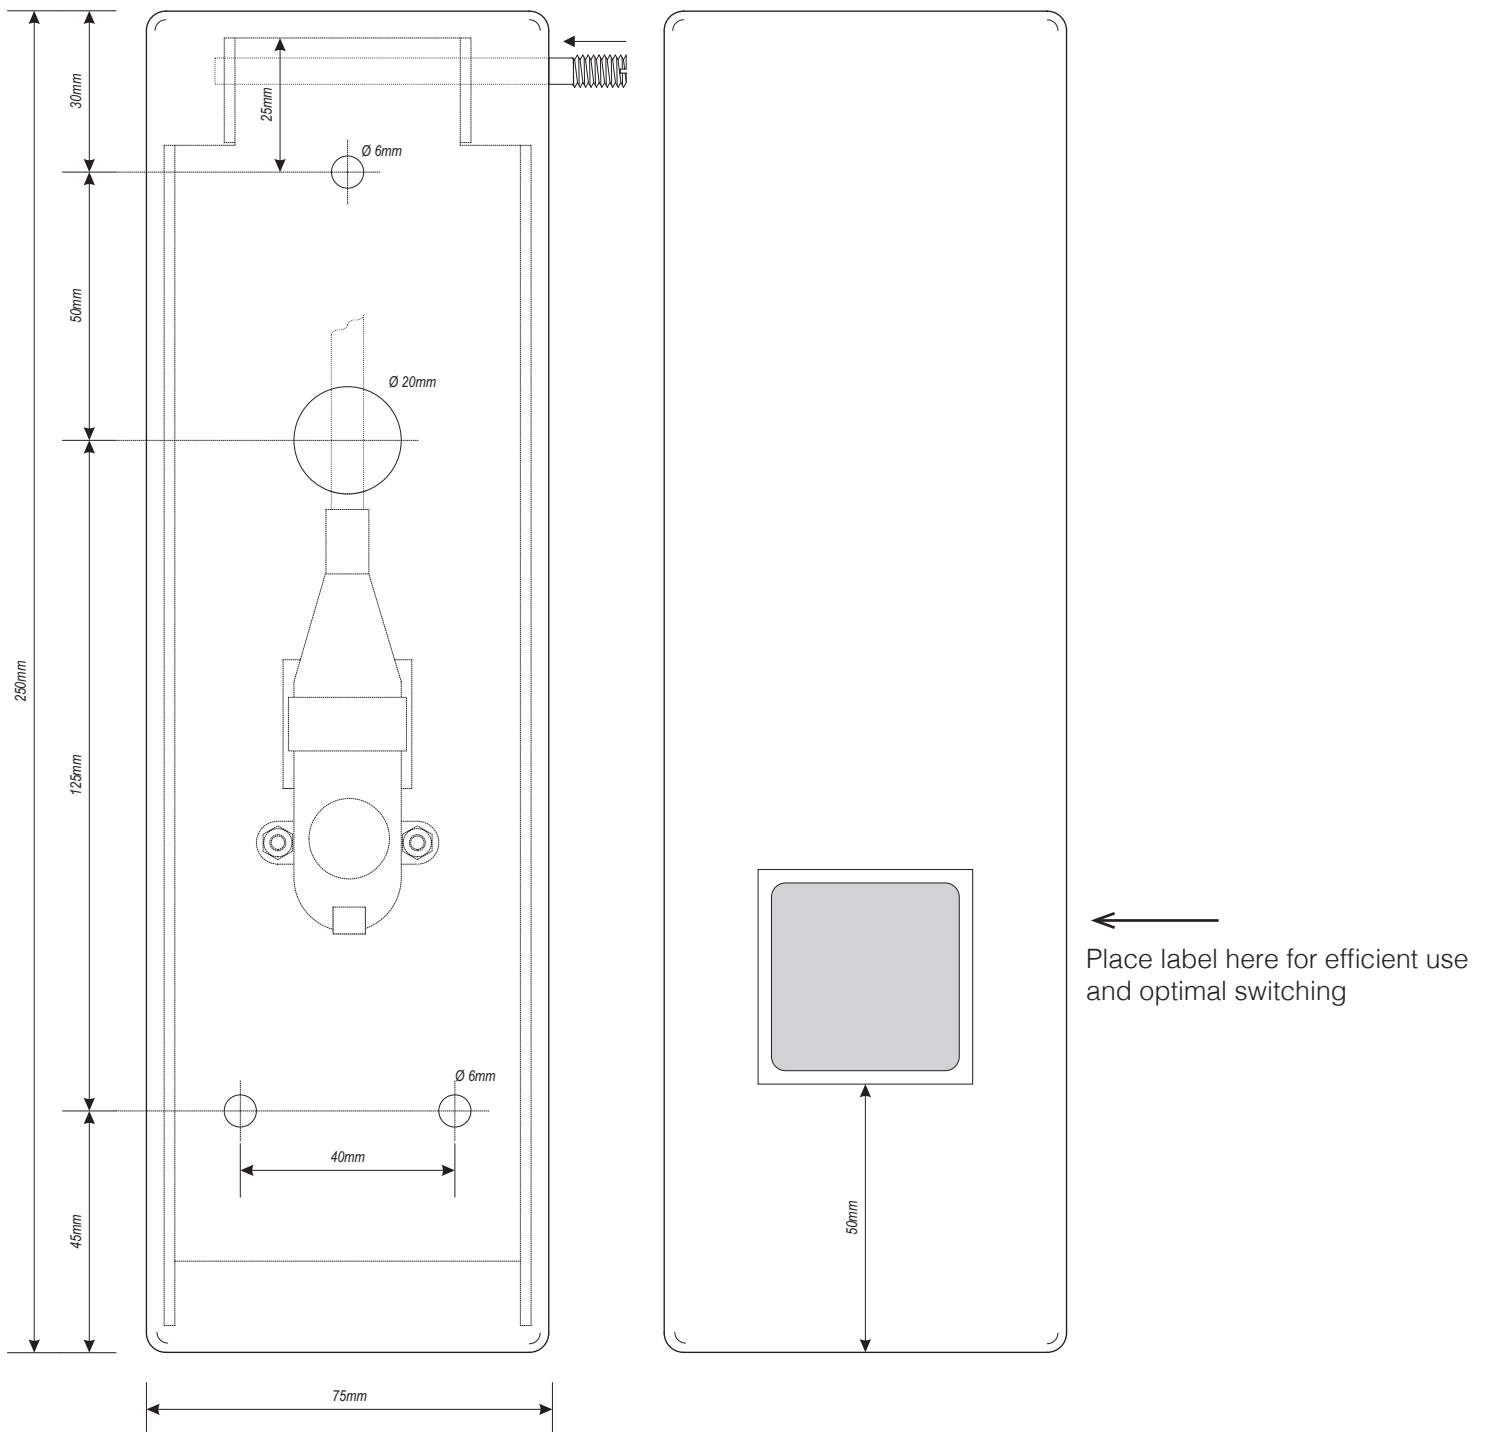

Specifications

SW-1

Current rating at 250V

Material

Dimensions

Operating temperature

Protection degree

Mechanical lifecycle

Warranty

Cable

Accessories

Push button

Nominal 5A

Thermal 12A

Stainless steel 304, mat polished

250 * 75 * 15mm (L * W * H)

0°C to +85°C

IP 66


ca. 2 million switches

2 years

3 x 0.75 mm, 500 mm length

filled waterproof

3 stickers

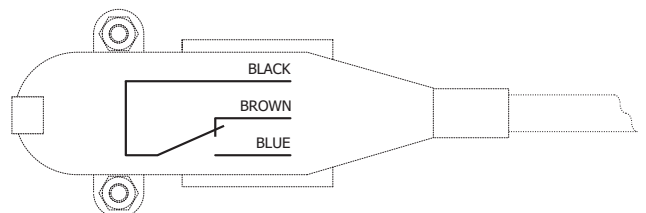

The specifications herein are subject to change without prior notice due to improvements.

OPTEX Technologies B.V.

Tiber 2, 2491 DH The Hague,


The Netherlands

TEL.: +31 (0)70-419-41-00

FAX : +31 (0)70-317-73-21

E-MAIL: info@optex.nl

WEBSITE: www.optex.nl

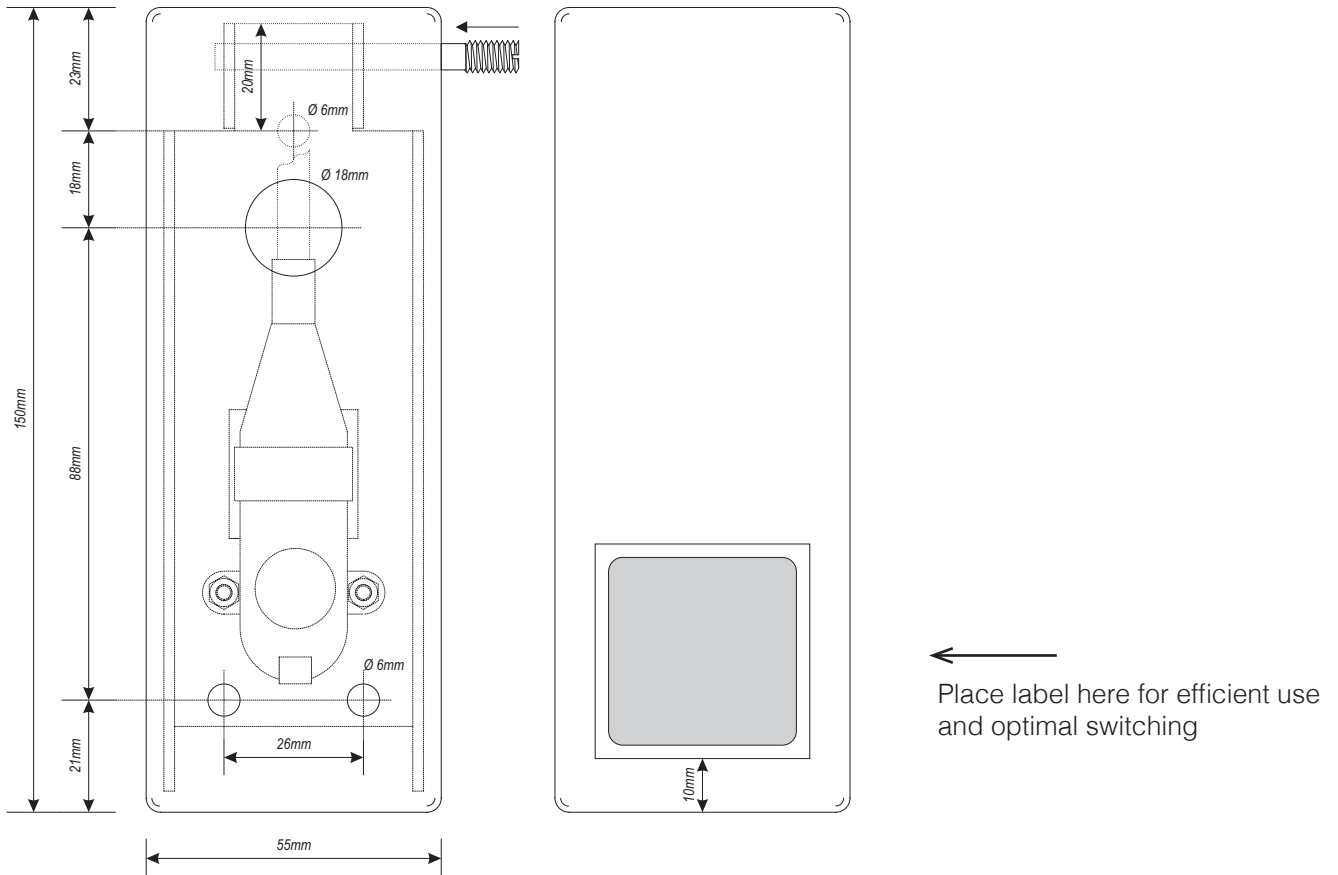

■ Specifications

SW-2

Current rating at 250V

Material

Dimensions

Operating temperature

Protection degree

Mechanical lifecycle

Warranty

Cable

Accessories

Push button

Nominal 5A

Thermal 12A

Stainless steel 304, mat polished

150 * 55 * 15mm (L * W * H)

0°C to +85°C

IP 66


ca. 2 million switches

2 years

3 x 0.75 mm, 500 mm length

filled waterproof

3 stickers

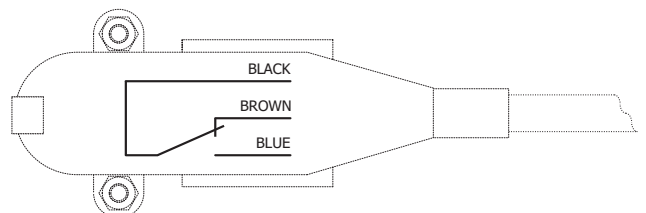

The specifications herein are subject to change without prior notice due to improvements.

OPTEX Technologies B.V.

Tiber 2, 2491 DH The Hague,

The Netherlands

TEL.: +31 (0)70-419-41-00

FAX : +31 (0)70-317-73-21

E-MAIL: info@optex.nl

WEBSITE: www.optex.nl